

# GAOKEview Capacitive Wall-mounted Digital Signage—Android Version T982

## Product Features



- Industrial-grade structural design concept, unibody frame, slim and beautiful body, simple installation and convenient maintenance, unique heat dissipation technology, supports 24/7 operation..
- Utilizing an IPS high-definition LCD panel, it boasts vibrant colors, high brightness, and supports up to 2160P video and image decoding playback, achieving high-quality image output..
- Equipped with a smart Android operating system, pre-installed with front-end information publishing software, powerful functions, and support for third-party software installation, it can meet diverse usage needs..
- Adopting a high-channel capacitive G+G touch solution, it offers precise touch, smooth writing, rapid response, and strong anti-interference capabilities, supporting up to 20-point touch.
- Widely used in government and enterprise sectors, healthcare, finance, education, transportation, supermarkets, multimedia exhibition halls, and other scenarios requiring touch-screen queries and intelligent interaction, this is a high-end intelligent touch-screen all-in-one machine..

Display Parameter					
Screen level	Brand new A+ brand LCD screen				
Size	32inch	43inch	50inch	55inch	65inch
Backlight Type	E-LED	E-LED	E-LED	E-LED	E-LED
Resolution	1920x1080	3840x2160	3840x2160	3840x2160	3840x2160
Aspect ratio	16:9	16:9	16:9	16:9	16:9
Brightness	≥350cd/m2	≥350cd/m2	≥350cd/m2	≥350cd/m2	≥350cd/m2
Refreshing Frequency	60Hz	60Hz	60Hz	60Hz	60Hz
Viewing Angle	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)
View Area (mm)	698(H)x393(V)	941(H)x529(V)	1095.84(H)x616.41(V)	1209.6(H)x680.4(V)	1428.48(H)x803.52(V)
Surface Treatment	Foggy Surface (Haze 1%)				
Display Colors	16.7M (8-bit )				

Touch Parameter	
Touch Type	Capacitive G+G Touch Technology (32inch and 43inch) Capacitive G+FF Touch Technology(50inch 55inch and 65inch)
Touch resolution	9600*9600 for 32inch 16384*16384 for 43inch 50inch 55inch 65inch
Touch points	Supports up to 10 touch points
Response Time	≅5ms
Touch Accuracy	≅2mm
Input Mode	Finger or capacitive touch pen
Touch interface	USB
Drive mode	USB free drive
Calibration method	Special software Calibration
Life time	More than 50 million times
Data output method	Coordinate output

Structure Parameter					
Size	32inch	43inch	50inch	55inch	65inch
Color	Black、 Silver				
Surface Material	Tempered glass (physical tempering process)				
Border material	Aluminum profile (oxidized wire drawing process)				
Body material	Galvanized plate (metal spraying process)				
Packaging material	Gravity carton (neutral packaging)				
Product dimensions(mm)	739.6*433.8*64mm	981.6*569.6*64mm	1133.8*654.4*69.2mm	1271.6*742.4*70.7mm	1490.48*865.52*70.7mm
Package Size(mm)	863*157*587mm	1106*157*721mm	1261*157*808mm	1375*165*870mm	1560*170*995mm
VESA Screw Hole	400*200mm	400*200mm	400*200mm	400*200mm	400*400mm
N.W/G.W	10KG/13.5KG	17KG/19KG	23KG/27.2KG	26KG/32KG	33KG/40KG
Wall mount bracket	Standard horizontal/vertical universal bracket				
Installation method	Wall -mounted/embedded/mobile stand and other installation methods				


System Configuration	
Operating System	Android
CPU	T982 Quad-core Cortex-A55 Max 1.9GHz
GPU	Mali -G52
RAM	4GB
ROM	32GB
Android Version	Android 14
Input interfaces	USB3.0 *1, USB OTG*1, TF Slot*1,LAN*1,DC-12V-IN HDMI*1
Audio Interface	3.5mm dual-channel audio interface*1
Network	Supports RJ45 R/A 100Mbps Ethernet; 2.4GHz + 5GHz dual-band Wi-Fi 6; Supports Wi-Fi 802.11 a/b/g/n/ac/ax protocols; Bluetooth 5.3; Supports external 4G and 5G modules.

System functions	
Software support	Supporting installation of third-party application software
WIFI-Hotspot	Support WIFI-Hotspot
Start-up method	Power on start
System Authority	Open the root privileges for customized product development
Remote monitoring	Real-time remote monitoring, self-recovery from system crashes, 24/7 unattended operation.
Play mode	Supports switching between server and standalone modes.
Language	Support Chinese, Traditional Chinese, English and other languages
Memory expansion	Support up to 256G TF card expansion
Customization	Customizable boot LOGO
Audio function	2-channel output (8 $\Omega$ /5W dual audio amplifier output)
Screen rotation	Supports manual rotation at 0° , 90° , 180° , and 270° , and supports automatic rotation via an external gravity sensor module.
Mouse and Keyboard Functions	Standard Android keyboard, third-party input methods(optional)
USB function	Updating/Playing Media Files/External Devices


Electrical Performance	
Applicable scene	Indoor Installation and using
Rated voltage	AC110-220V
Standby power	$\leq 1W$
Rated power	32" $\leq 45W$ 43" $\leq 45W$ 50" $\leq 65W$ 55" $\leq 85W$ 65" $\leq 170W$
Working environment	Temperature-0℃~55℃/humidity 10%RH~90%RH
Storage environment	Temperature - 5℃~60℃/humidity 10%RH~90%RH
Life time	>80000 hours
Notes	Please do not use it in an environment exposed to rain, moisture, oil, or direct sunlight to avoid equipment damage.

Packing List	
Machine	x1
Wall-mounted bracket	x1
Power cord	x1
Remote control	x1
WiFi antenna	x1
Warranty card/Certificate of qualification	x1


### Product View-32inch

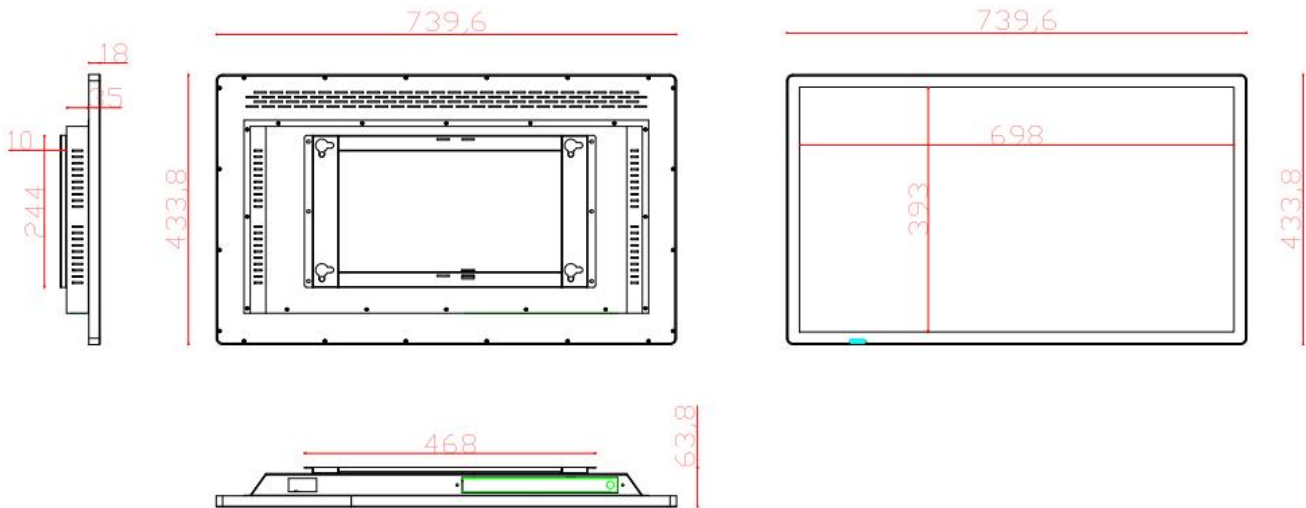


### Product View-43inch

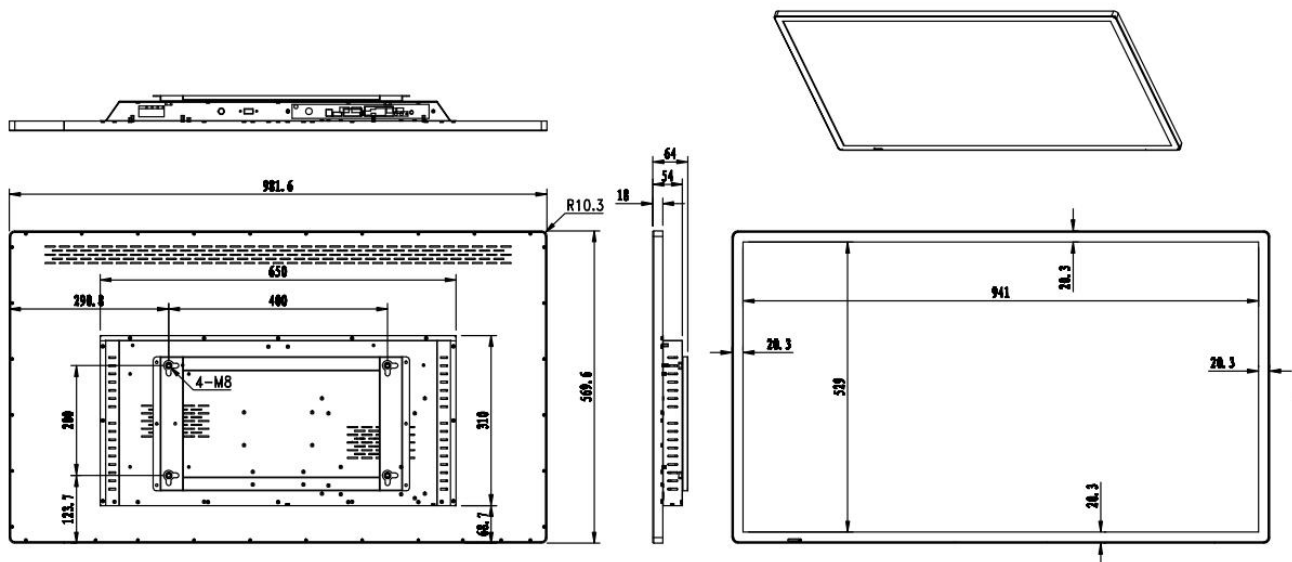

## Product View-50inch

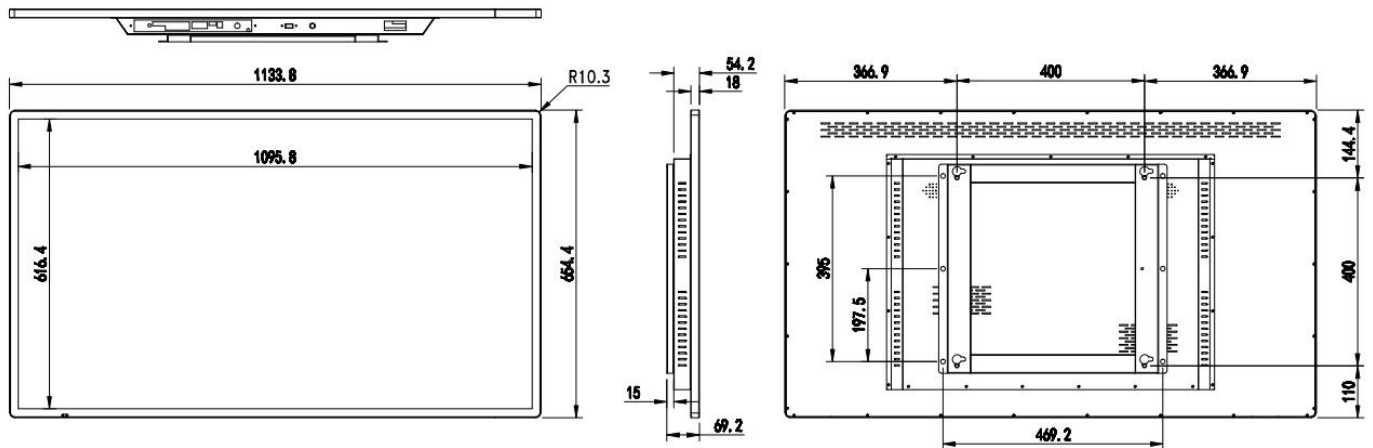

## Product View-55inch

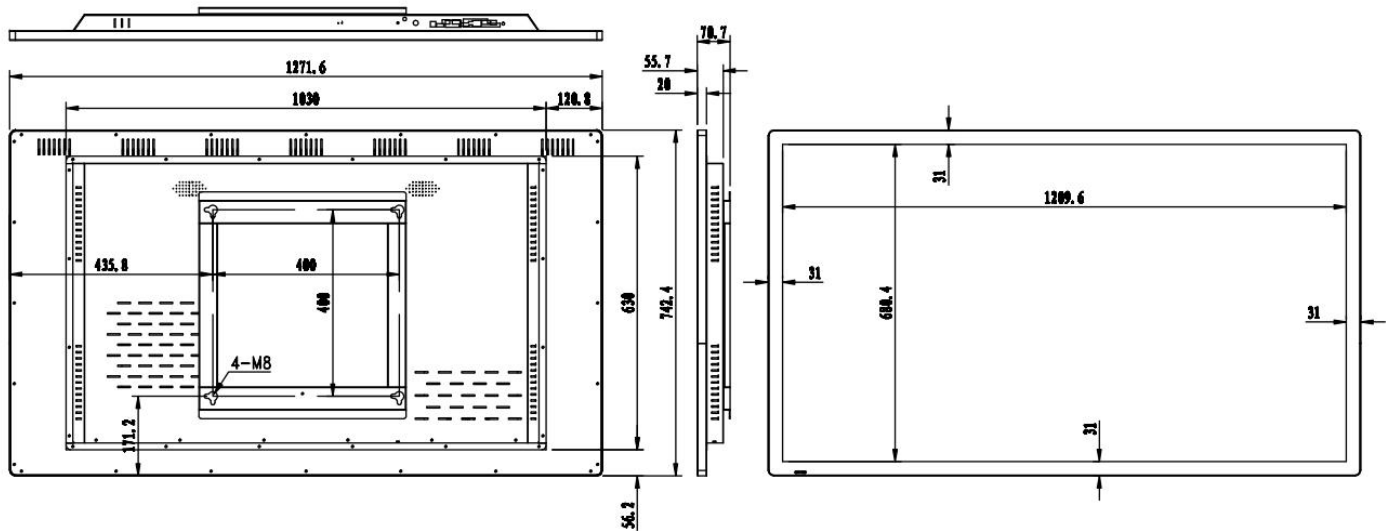

## Product View-65inch

