

GAOKEview Infrared Floor Standing Digital Signage-Android Version T982

Product Features



- The whole machine adopts an industrial-grade design concept. The body is beautiful, thin and easy to install. It adopts a convection cooling scheme internally, which has good heat dissipation effect and can operate stably for a long time without interruption.
- 4mm physically tempered glass on the front, with high hardness and high safety protection factor; the frame is made of aluminum profiles with fine frosting process; the body is made of metal galvanized sheet, and the metal spraying process is used to prevent rust and paint stripping.
- Using a high-grade new 16:9 high-definition LCD display, it has high brightness, good colors, and delicate pictures. It supports up to 1080P audio and video decoding and playback, and can achieve high-quality picture output display.
- Adopting a high-precision infrared touch solution, it has accurate touch, smooth writing, stable operation, and good anti-interference performance; it supports multi-point touch to meet the different touch needs of users.

- Equipped with a smart Android operating system, it is easy to operate, powerful, and runs smoothly without lag; it is pre-installed with information publishing software; it has open ROOT permissions and can install client third-party software.
- It has a wide range of application scenarios, adapts to diversified installation environments, and supports various installation methods such as wall-mounted and embedded in horizontal and vertical directions; it is a multi-purpose intelligent high-end display device.

Display Parameter						
Screen level	Brand new A+ brand LCD screen					
Size	43inch	50inch	55inch	65inch	75inch	85inch
Backlight Type	E-LED	E-LED	E-LED	E-LED	D-LED	D-LED
Resolution(pixels)	1080x1920	1080x1920	2160x3840	2160x3840	2160x3840	2160x3840
Aspect ratio	9:16	9:16	9:16	9:16	9:16	9:16
Brightness	≥350cd/m2(typ.)	≥350cd/m2(typ.)	≥350cd/m2(typ.)	≥350cd/m2(typ.)	≥350cd/m2(typ.)	≥350cd/m2(typ.)
Response Time	6ms (typ.)	6ms (typ.)	6ms (typ.)	6ms (typ.)	6ms (typ.)	8ms (typ.)
Refreshing Frequency	60Hz	60Hz	60Hz	60Hz	60Hz	60Hz
Viewing Angle	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)
Contrast ratio	3000:1	3000:1	3000:1	3000:1)	3000:1	3000:1
View Area (mm)	529.25(H)x940.89(V) mm	616.4(H)x1096.2(V) mm	683.4(H)x1212.6(V) mm	803.5(H)x1428.5(V) mm	931(H)x1653(V) mm	1053(H)x1872(V) mm
Display Colors	16.7M(8bit)	16.7M(8bit)	16.7M(8bit)	16.7M(8bit)	16.7M(8bit)	16.7M(8bit)

Touch Parameter	
Touch Type	Infrared Touch Technology
Touch life	>500 million times
Touch surface	Tempered glass
Touch resolution	32768x32768
Touch points	Supports up to 20 touch points at most
Response Time	Single point mode: click 4ms, continuous 2ms
	Multi-points mode: click 5ms, continuous 3ms
Touch Accuracy	≤2mm
Input Mode	Finger or Pen
Output method	Coordinate
Anti-light performance	Incandescent lamp (220V,100W), the vertical distance of 350mm above the sunlight illumination up to 90000Lux
Drive mode	USB free drive
Calibration method	Special software

Structure Parameter						
Size	43inch	50inch	55inch	65inch	75inch	85inch
Border color	Black or silver					
Body color	Black					
Surface Material	4mm tempered glass					
	Physical tempering process					
Border material	Aluminum profile					
	Oxidation drawing process					
Body material	Galvanized sheet					
	Metal spraying process					
Packaging material	Neutral thickened carton					
Product dimensions (mm)	1733 (H) *569.3 (W) *450 (Including Base)	1733 (H) *656.4 (W) *450 (Including Base)	1793 (H) *720.4 (W) *450 (Including Base)	1933 (H) *843.5 (W) *450 (Including Base)	2245 (H) *1033.6 (W) *560 (Including Base)	2353 (H) *1171 (W) *560 (Including Base)
Package Size	1750*155*755 mm	1775*155*755 mm	1955*173*870 mm	2015*173*984 mm	2283*1113*198 mm	2450*1300*200 mm
Gross weight	37.6kg	40.6kg	48kg	56.7kg	107kg	128kg


System Configuration	
Operating System	Android
CPU	T982 Quad-core Cortex-A55 Max 1.9GHz
GPU	Mali -G52
RAM	4GB
ROM	32GB
Android Version	Android 14
Input interfaces	USB3.0 *1, USB OTG*1, TF Slot*1,LAN*1,DC-12V-IN HDMI*1
Audio Interface	3.5mm dual-channel audio interface*1
Network	Supports RJ45 R/A 100Mbps Ethernet; 2.4GHz + 5GHz dual-band Wi-Fi 6; Supports Wi-Fi 802.11 a/b/g/n/ac/ax protocols; Bluetooth 5.3; Supports external 4G and 5G modules.
System Upgrade	Supports OTA remote upgrade, USB Flash disk upgrade

System functions	
Software support	Supporting installation of third-party application software
WIFI-Hotspot	Support WIFI-Hotspot
Start-up method	Power on start
System Authority	Open the root privileges for customized software development
Remote monitoring	Real-time remote monitoring, self-recovery from system crashes, 24/7 unattended operation.
Play mode	Supports switching between server and standalone modes.
Language	Support Chinese, Traditional Chinese, English and other languages
Memory expansion	Support up to 256G TF card expansion
Customization	Customizable boot LOGO
Audio function	2-channel output (8 Ω /5W dual audio amplifier output)
Mouse and Keyboard Functions	Standard Android keyboard, third-party input methods(optional)
USB function	Updating/Playing Media Files/External Devices




Electrical Performance	
Applicable scene	Indoor Installation and using
Rated voltage	AC110-220V
Standby power	≤1W
Rated power	43" ≤65W 50" ≤70W 55" ≤85W 65" ≤110W 75" ≤240W 85" ≤280W
Working environment	Temperature-0℃~55℃/humidity 10%RH~90%RH
Storage environment	Temperature - 5℃~60℃/humidity 10%RH~90%RH
Life time	>80000 hours
Notes	Please do not use it in an environment exposed to rain, moisture, oil, or direct sunlight to avoid equipment damage.

Packing List	
Machine	x1
Matching screws	x1
Hex wrench	x1
Power Cord	x1
Remote control	x1
WiFi antenna	x1
Warranty card/Certificate of qualification	x1




Product View-43inch

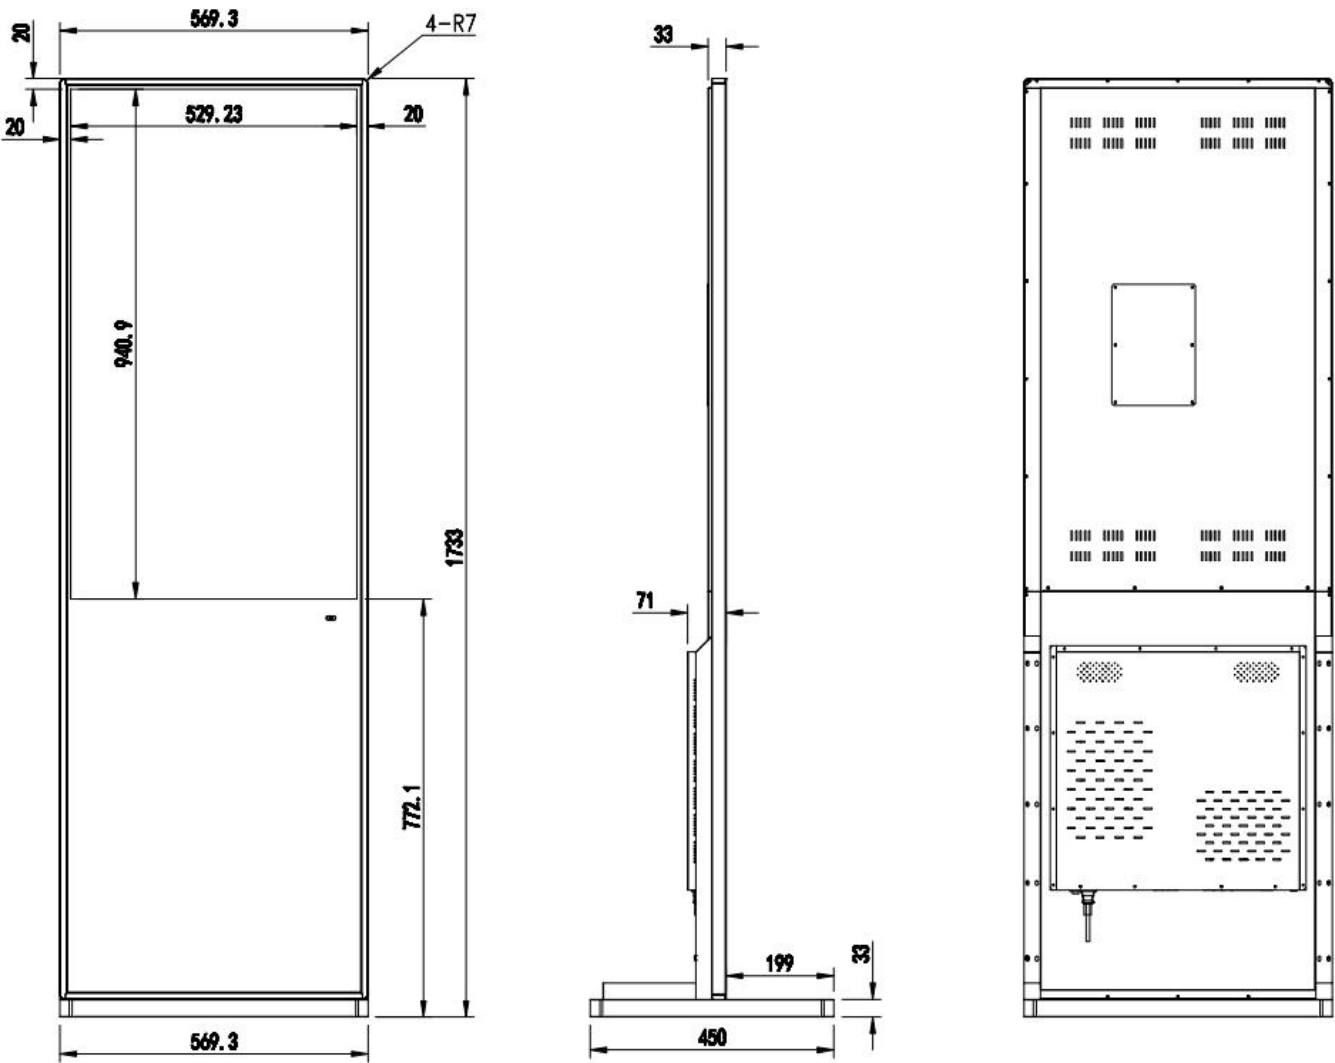



Product View-50inch

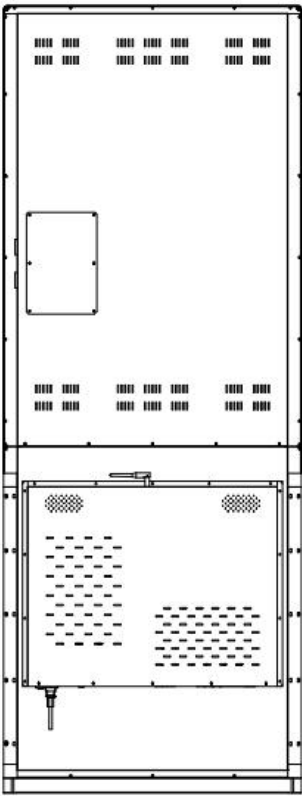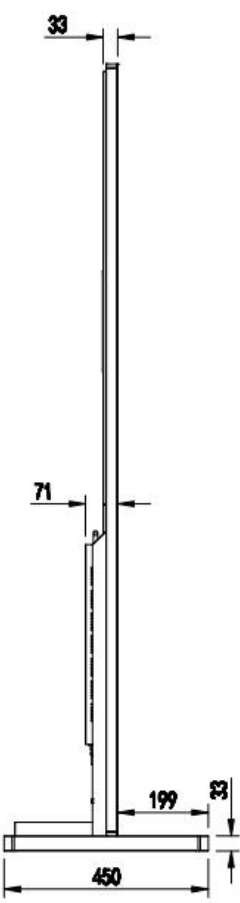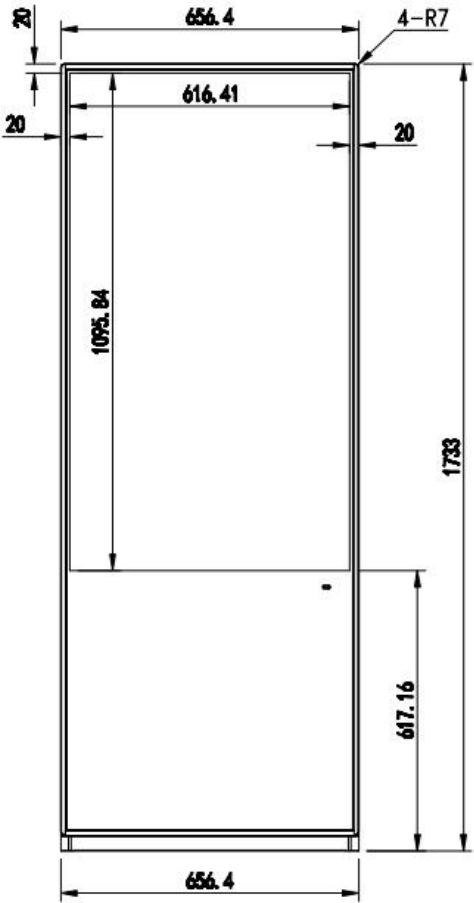


Product View-55inch

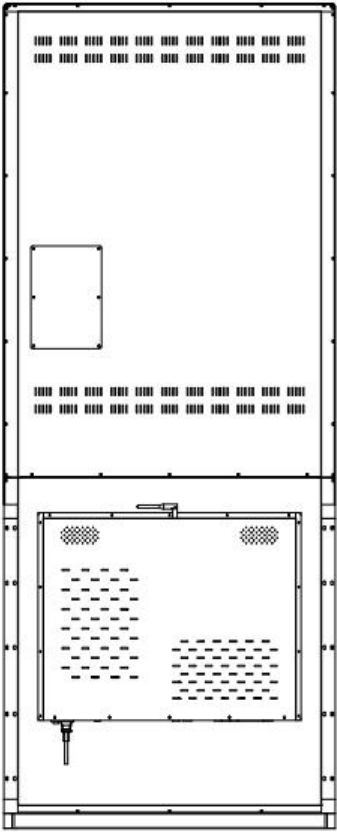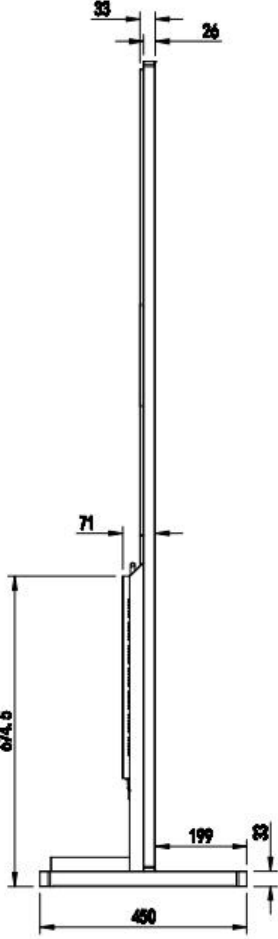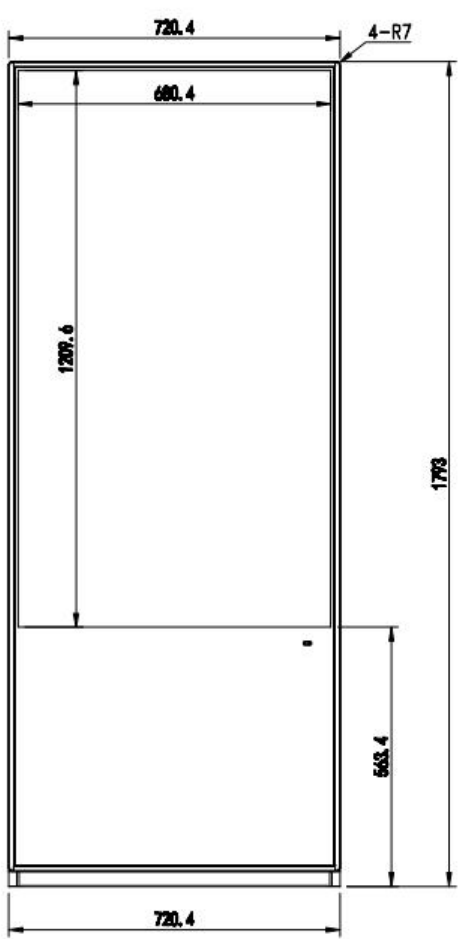

Product View-65inch

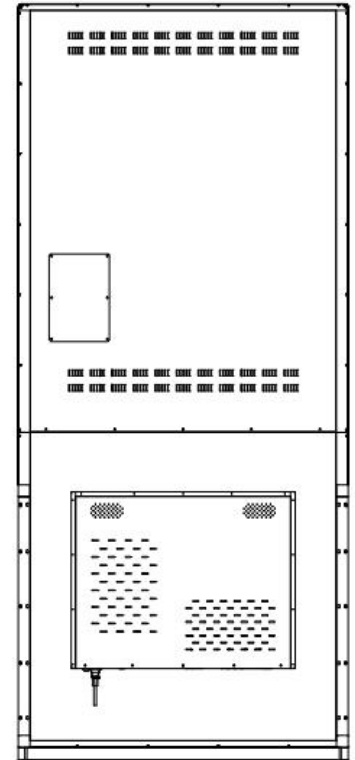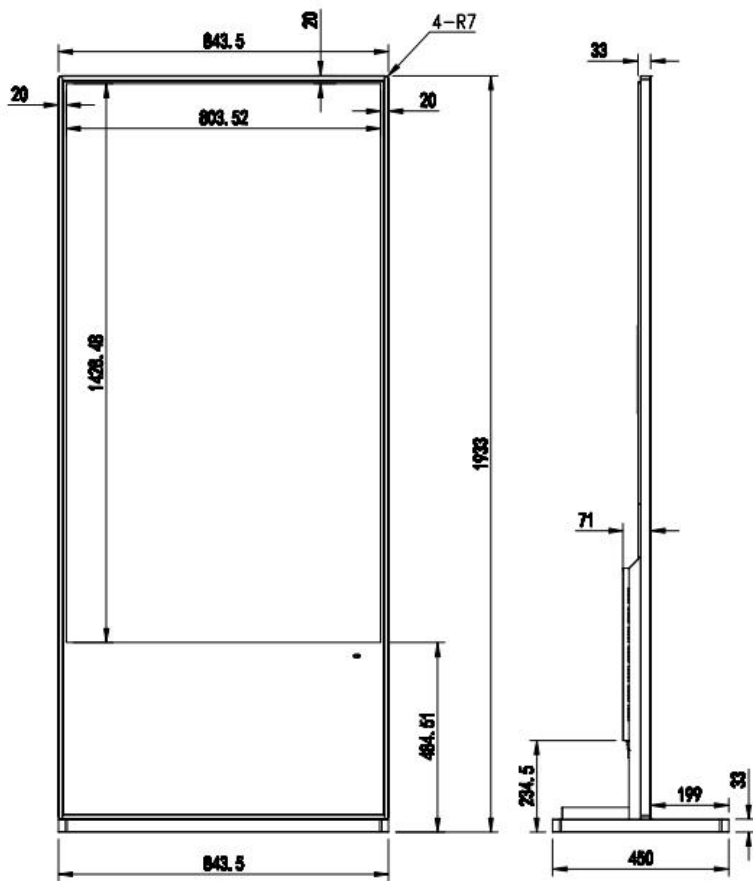

Product View-75inch

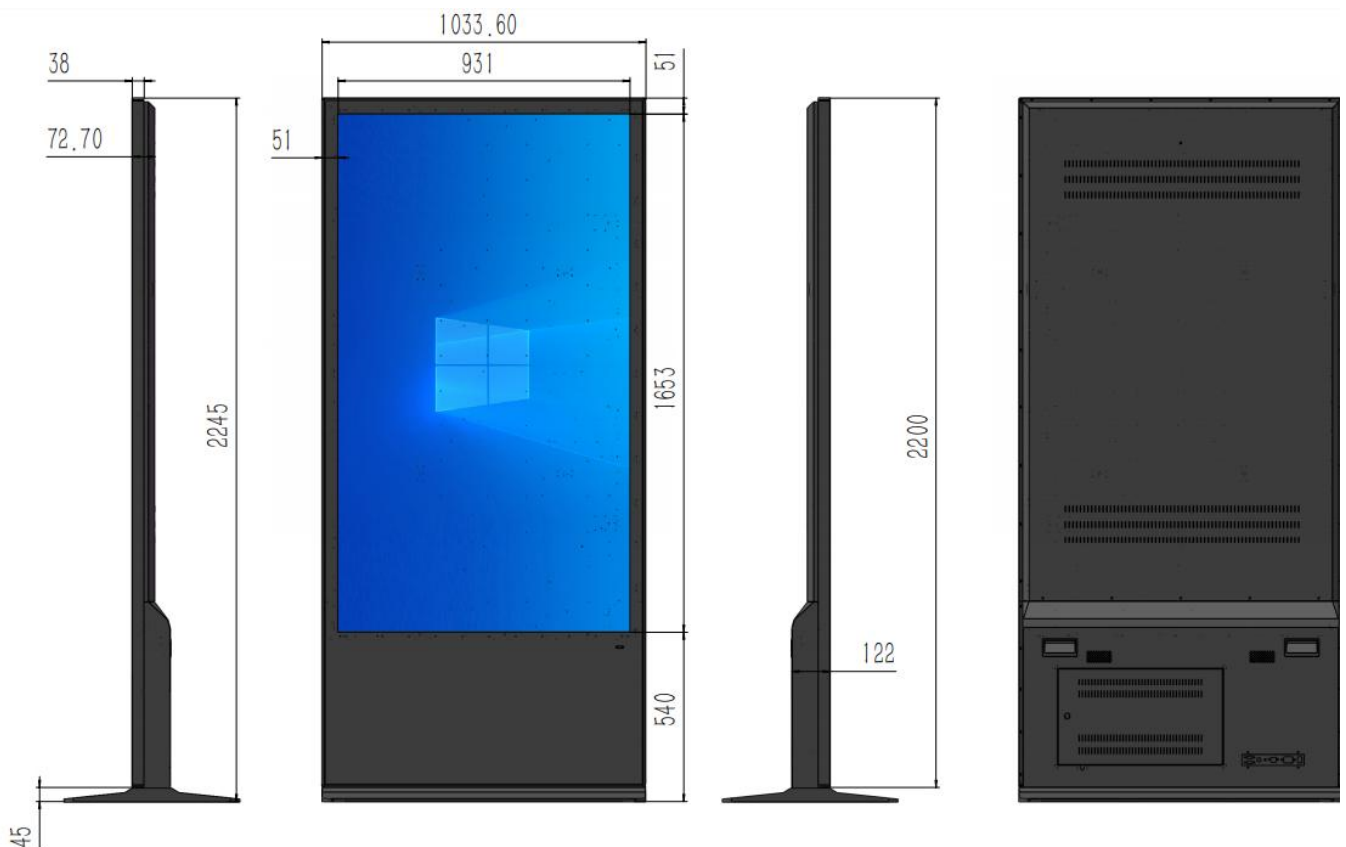

Product View-85inch

