



GAOKEview®

Floor Standing Digital Signage

Ultra High Definition

Intelligence

Powerful functions

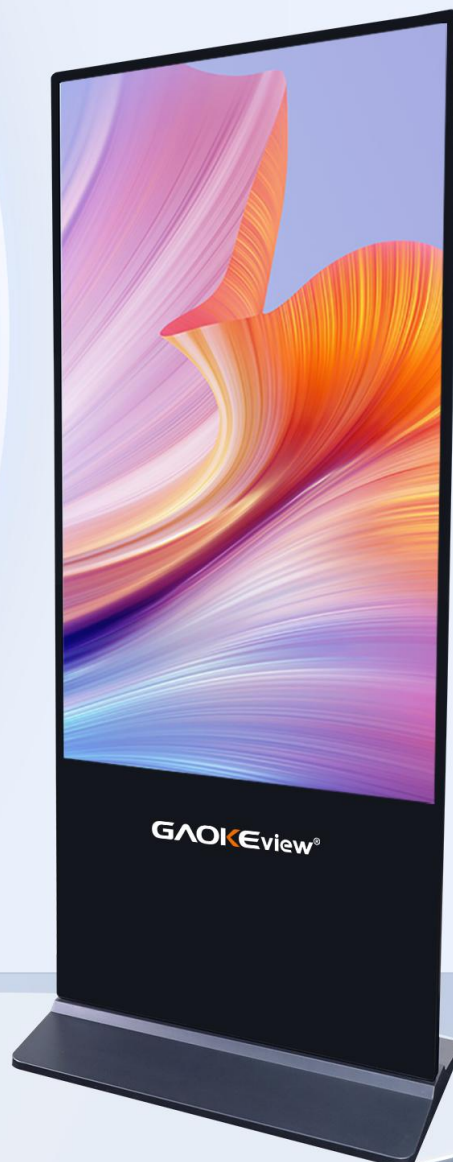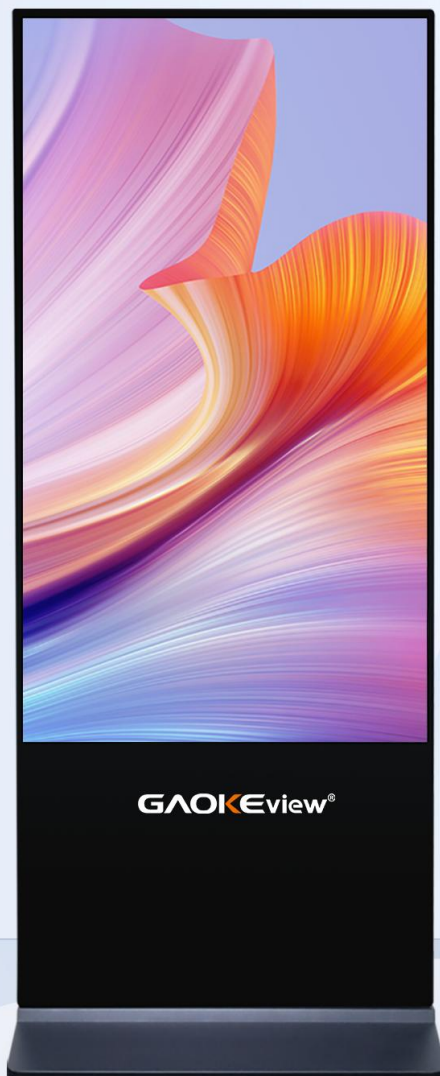

Product feature



2K/4K(Optional)



Operating System
(Optional)



U-Disk Playback



Remote control



Touch screen
(optional)



178 Viewing
Angle



Split Screen Play




Support
customization

Ultra High Definition

Aluminum alloy frame

Super tough
tempered glass

Metal back and base

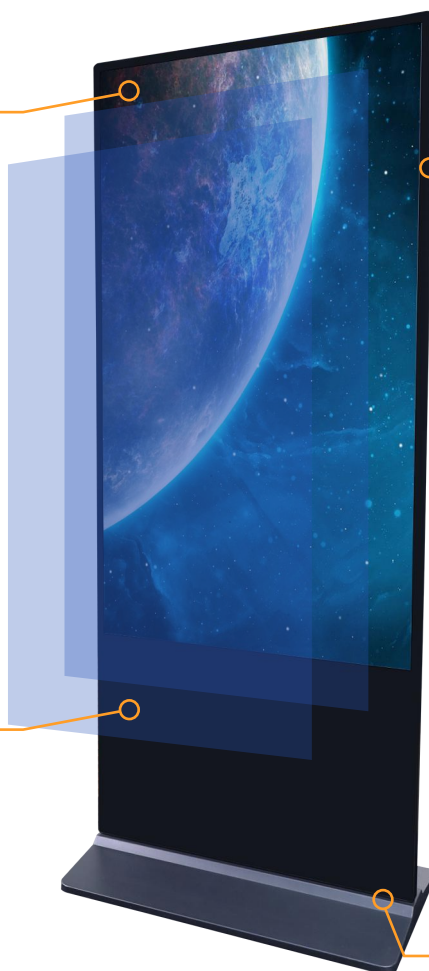

32- 85 inch floor standing advertising player

A Grade glass + UHD panel.

Android or windows OS.

Support WIFI and L AN.


Touch function optional.

Metal shell + toughened glass.

Support remote advertising programs.


Supports looping playback of various pictures and videos.

Support advertising program content management and split-screen playback.

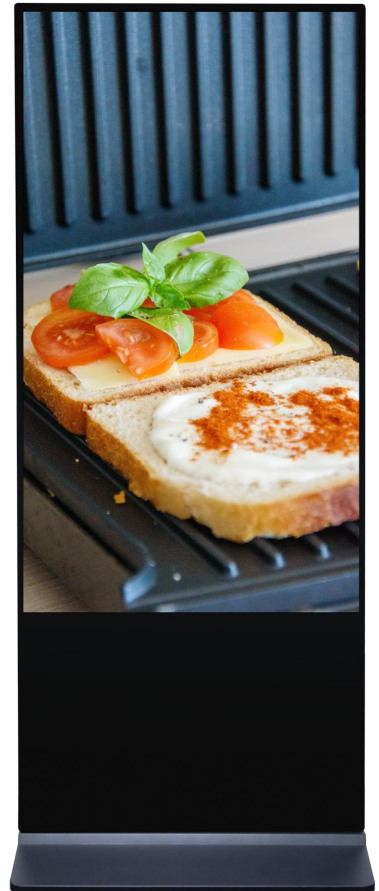

Android / windows system optional

Android APP application , windows system computer application

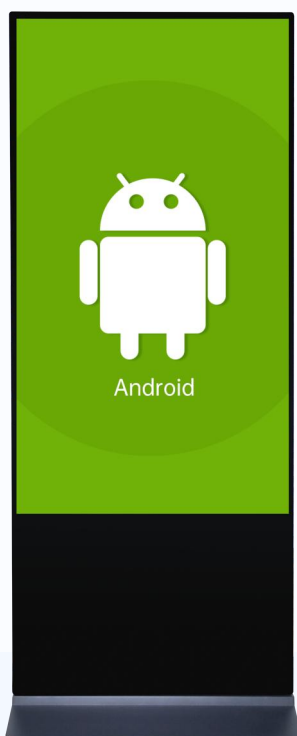

A Grade glass UHD panel

16.7M colors, bring better
display experience.

All round protection

Pursue every detail, what you worry about is what we consider



Original toughened glass,
explosion-proof and high
temperature resistant.









The back cover is made
of imported cold-rolled
steel plate.

The frame is made of
aluminum alloy, rust
proof and not easy to
damage.

Rich cooling hole design,
effectively reduce the
temperature.


Split screen design

Android version support multiple split screens mode. Pictures and video can be simultaneously played. Support video、pictures、scroll subtitles.

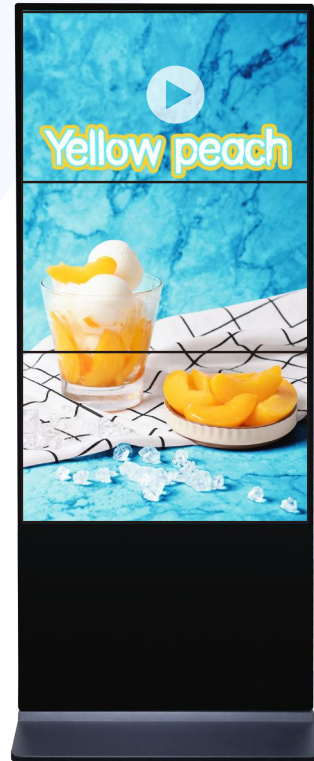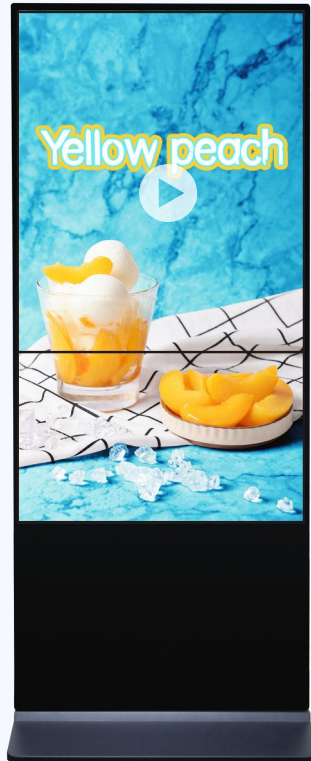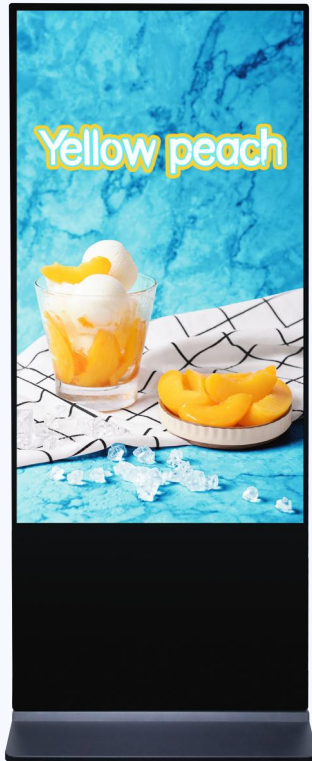

Touch function(optional)

Multi-touch screen, infrared touch screen, capacitive screen: can achieve a more effective human computer interactive function.

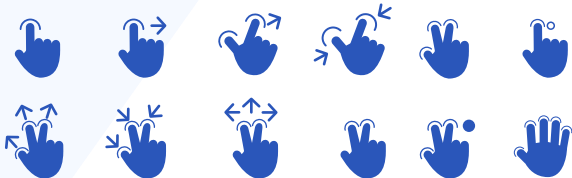


Content Management Software

Remotely control advertising content

Remotely control the volume, Timer on/off, Synchronous update

Real-time monitoring by Computer

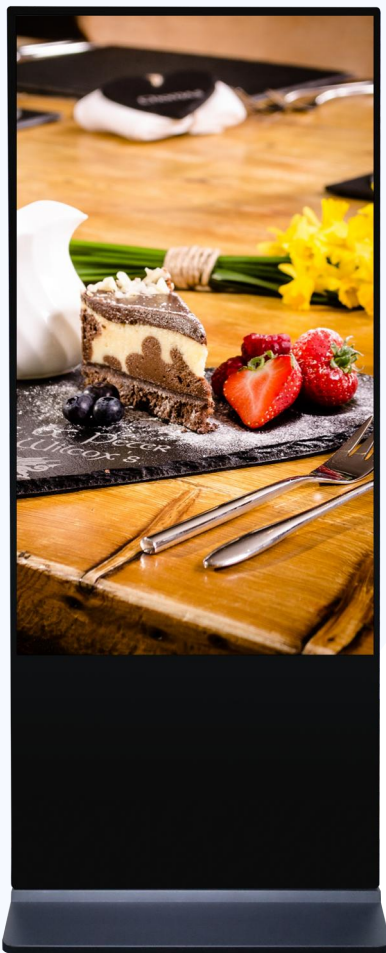

1、Connect the device to the network



2、Make program



3、Remotely publish the program to the screen





Product specification

Size	43"	50"	55"	65"	75"	85"
Light source	ELED	ELED	ELED	ELED	ELED	ELED
Display area	529.2x940.87mm	616.4x1096.2mm	680x1208mm	803.5x1428.5mm	931x1653mm	1053x1872mm
Resolution	1920x1080 (4K Optional)	1920x1080 (4K Optional)	3840x2160	3840x2160	3840x2160	3840x2160
Brightness	350cd/m ² (typ.)	350cd/m ² (typ.)	350cd/m ² (typ.)	350cd/m ² (typ.)	350cd/m ² (typ.)	350cd/m ² (typ.)
Contrast Ratio	3000:1	3000:1	3000:1	3000:1	3000:1	3000:1
Response time	<6ms	<6ms	<6ms	<6ms	<6ms	<8ms
Viewing Angle	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)
Life Time	30,000 hrs (min.)	30,000 hrs (min.)	30,000 hrs (min.)	30,000 hrs (min.)	30,000 hrs (min.)	30,000 hrs (min.)
Android systems	Android 14 ,4GB RAM 32GB ROM					
Windows System	Optional					
Input interfaces	USB 3.0*1 ,USB OTG*1 ,TF Slot*1 ,LAN					
HMDI interface	HDMI Input*1					
Audio Interface	3.5mm Earphone hole*1					