


GAOKEview Interactive Flat Panel

Technical Specification-U3-3576



4K

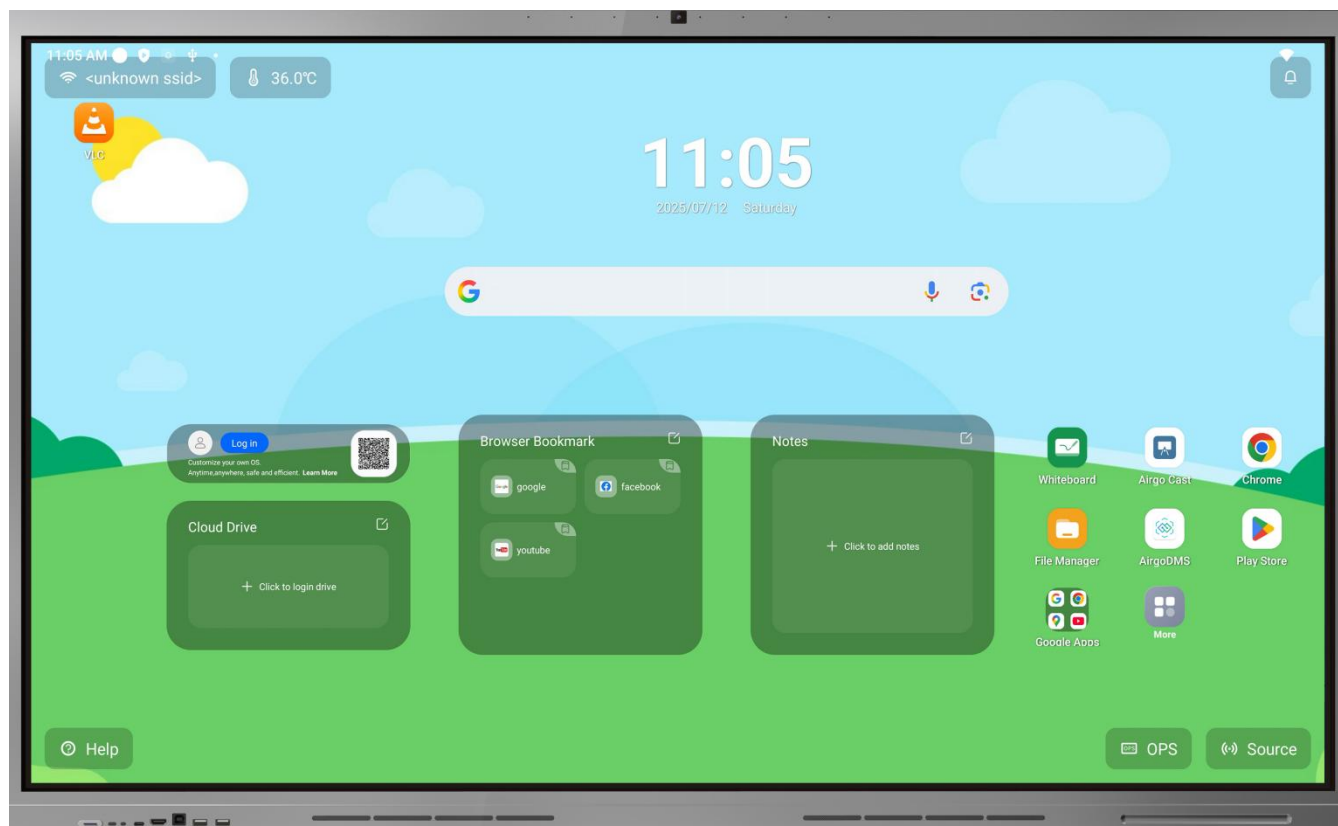


OTA



Human body sensors



Android 14



Octa Cores



Optical Character
Recognition



Multi-Users
Management



Hardware
Detection

Display Parameter

Size	55inch	65inch	75inch	86inch	98inch
Backlight Type	D-LED	D-LED	D-LED	D-LED	D-LED
Panel Brand	BOE/CSOT	BOE	BOE/CSOT	BOE/CSOT	BOE/CSOT
Resolution (pixels)	3840x2160	3840x2160	3840x2160	3840x2160	3840x2160
Brightness	≥350cd/m2(typ.)	≥350cd/m2(typ.)	≥350cd/m2(typ.)	≥400cd/m2(typ.)	≥400cd/m2(typ.)
Aspect Ratio	16:9	16:9	16:9	16:9	16:9
Contrast Ratio	5000:1	5000:1	1200:1	5000:1	5000:1
Response Time	6ms (typ.)	6ms (typ.)	6ms (typ.)	8ms (typ.)	6ms (typ.)
Pixel Pitch (mm)	0.105(H) x 0.315(V)	0.1433(H) x 0.4298(V)	0.315(H) x 0.315 (V)	0.14325(H) x 0.42975(V)	0.315 (H) x 0.315(V)
Refreshing Frequency	60Hz	60Hz	60Hz	60Hz	60Hz
Viewing Angle	178°(H)/178°(V)	178°(H)/178°(V)	178°(H)/178°(V)	178°(H)/178°(V)	178°(H)/178°(V)
Life Time	100,000 Hrs(min.)	100,000 Hrs(min.)	100,000 Hrs(min.)	100,000 Hrs(min.)	10,000 Hrs(min.)
View Area (mm)	1209.6(H)× 680.4(V)	1428.48(H)× 803.52(V)	1650.24(H)× 928.26(V)	1872 (H) × 1053(V)	2158.848 (H) × 1214.352(V)
Color Gamut (X% NTSC)	72%(NTSC)	72%(NTSC)	72%(NTSC)	72%(NTSC)	72%(NTSC)
Colorfulness	1.07B(8 bit)	1.07B(8 bit)	1.07B(10 bit)	1.07B(8 bit)	1.07B(10 bit)

System

Chipset	RK3576
CPU Architecture	Octa-core, A72*4 + A53*4
CPU Working Frequency	Max 2.2GHz
GPU	Mali G52MC3
RAM	Standard: 8GB DDR
ROM	Standard: 128GB EMMC
OS	Android 14.0
Power Requirements	AC 100 V ~ 240 V, 50/60 Hz
55" Power Consumption Without OPS	<180 W
65" Power Consumption Without OPS	<200 W
75" Power Consumption Without OPS	<250 W
86" Power Consumption Without OPS	<380 W
98" Power Consumption Without OPS	<500 W